


滾珠直線軸承-LM

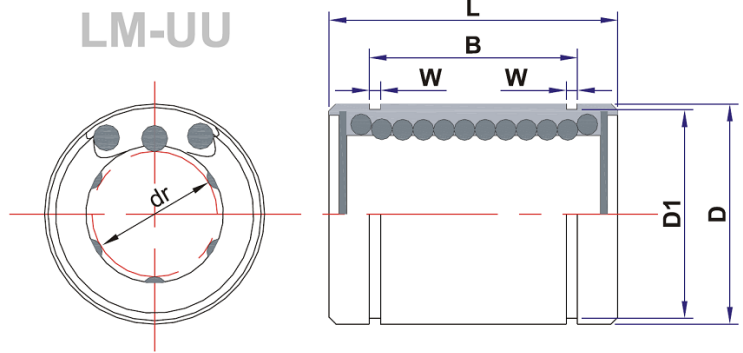

主要尺寸													基本額定荷重										
型號	鋼珠列	重量 g	內徑		外徑		長度		外扣環溝			W	偏心 (max.)	徑向間隙 (max μ m)	動 C(kgf)	靜 Co(kgf)							
			dr	公差	D	公差	L	公差	B	公差	D1												
LM 3	4	1.4	3	0	7	0	10	0					0.008	-3	7	11							
LM 4		2.0	4	-0.008	8	-0.009	12	-0.12							9	13							
LM 5		4.0	5		10		15		10.2		9.6	1.1			17	21							
LM 6		8.5	6		12	0	19		13.5		11.5				21	27							
LM8S		11	8	-0.011	15		17		11.5		14.3				18	23							
LM 8		17	8		15		24		17.5		14.3				27	41							
LM10		32	10	-0.009	19		29	0	22	0	18				0.012	-4	38	56					
LM12		36	12		21	0	30	-0.20	23	-0.20	20						1.3	42	61				
LM13		43	13		23	-0.013	32		23		22						52	79					
LM16		70	16		28		37		26.5		27						1.6	-6	79	120			
LM20	90	20	0	32	0	42		30.5		30.5	88		140										
LM25	230	25	-0.010	40	-0.016	59		41		38	0.015		-8	100					160				
LM30	260	30		45		64		44.5		43		1.85		160					220				
LM35	400	35	0	52	0	70	0	49.5	0	49		2.1		0.020					-10	170	320		
LM40	600	40	-0.012	60	-0.019	80	-0.30	60.5	-0.30	57										220	410		
LM50	1600	50		80		100		74		76.5										2.6	-13	390	810
LM60	2000	60	0	90	0	110		85		86.5					3.15	480				1020			
LM80	4500	80	-0.015	120	-0.022	140	0	105.5	0	116					4.15	0.025				-20		750	1630
							-0.40		-0.40														