


Dry Flanged Plain Bearing-PFF

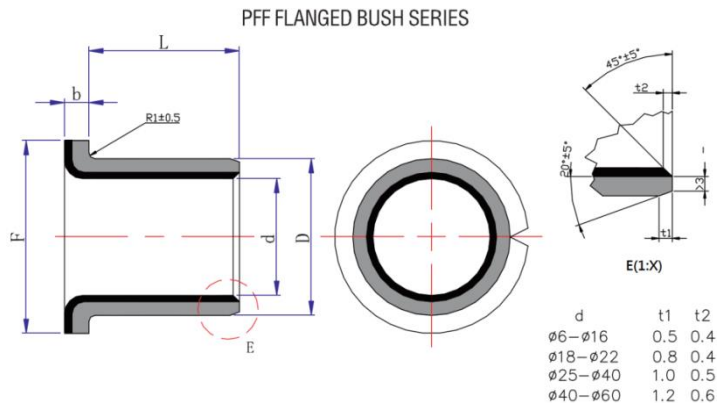

Ød	ØD	ØF±0.5	b-0.2	L±0.25														
				4	5	6	7	8	10	12	15	20	25	30	40			
5	7	10	1	●	●	●												
6	8	12			●	●	●	●										
7	9	13			●		●											
8	10	15				●		●	●	●								
10	12	18				●	●	●	●	●	●							
12	14	20				●	●	●	●	●	●							
14	16	22							●	●	●							
15	17	23							●	●	●	●						
16	18	24							●		●	●						
18	20	26							●	●	●	●						
20	23	31	1.5					●	●	●	●	●						
22	25	32						●	●	●	●							
25	28	35						●	●	●	●	●						
30	34	42	2						●	●	●	●	●					
35	39	47									●	●	●	●	●			
40	44	53								●		●	●	●	●	●		
45	50	60	2.5									●	●	●	●			
50	55	65										●		●	●			
55	60	70													●	●		
60	65	75														●	●	

Installed with f7 journals and H7 housing bore.