


铜基镶嵌固体润滑轴承-SPB



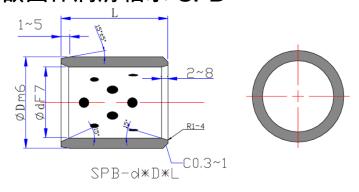

Ød		ØD											L^{-}	-0.10 -0.30									
				8	10	12	15	16	20	25	30	35	40	45	50	60	70	80	100	120	130	140	150
8	+0.028	12		•	•	•	•																
10	+0.018	14	+0.018	•	•	•	•		•														
12	+0.034	18			•	•	•	•	•	•	•												
13	+0.016	19			•		•		•														
14	+0.028	20			•	•	•		•	•	•												
15	+0.018	21			•	•	•	•	•	•	•												
16	+0.034	22	+0.021		•	•		•	•	•	•	•	•										
18	+0.016	24	+0.008				•	•	•	•	•	•	•	•	•								
20		28					•	•	•	•	•	•	•										
20		30						•	•	•	•	•	•	•	•	•							
25	+0.041	33						•	•	•	•	•	•	•	•								
25	+0.020	35	+0.025					•	•	•	•	•	•	•	•	•							
30		38							•	•	•	•	•	•	•	•							
30		40							•	•	•		•										
31.5		40	+0.009						•	•	•	•	•	•	•	•							
35	44 45 50 55 +0025 55 60 60 60 62									•	•	•	•	•	•								
35		45									•	•	•	•	•	•							
40		50							•	•	•	•	•	•	•	•	•	•					
40		55							•	•	•	•	•	•	•	•							
45		55									•	•	•	•	•	•							
45		56									•	•	•	•	•	•							
45		60									•	•	•	•	•	•	•	•					
50		60	+0.030 +0.011								•	•	•	•	•	•	•	•					
50		62									•	•	•	•	•	•	•						
50		65									•		•	•	•	•	•	•	•				
55	70 74 75 76 80 +0000 85											•	•	•	•	•							
60											•	•	•	•	•	•	•	•					
60											•	•	•	•	•	•	•	•	•				
63																•	•	•					
65															•	•	•	•					
70			-									•	•	•	•	•	•	•	•				
70		90													•	•	•	•					
75		90	+0.035													•	•	•	•				
75		95														•	•	•	•				
80		96											•	•	•	•	•	•	•	•			
80		100											•	•	•	•	•	•	•	•			
90		110														•		•	•	•			
100	+0.071	120														•	•	•	•	•			
110	+0.026	130																•	•	•			
120		140																•	•	•			
125		145 150 160	+0.040 +0.015																•	•			
130	+0.083																		•		•		
140	+0.042																		•			•	
150		170																	•				•
160		180																	•				•