



滾珠直線軸承加長型-LM-L

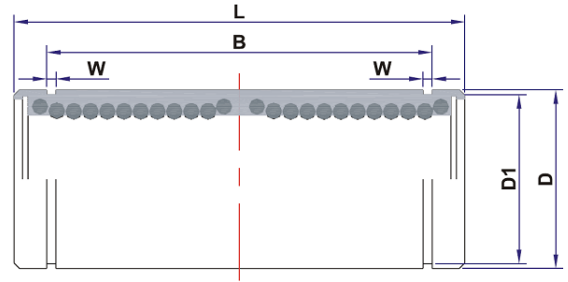

LM-LUU



| 主要尺寸 | | | | | | | | | | | | | 基本額定荷重 | | | |
|-------|-----|---------|----|----|--------|--------|--------|------|-------|-------|------|-----|--------------|-------------|--------------|-----|
| 型號 | 鋼珠列 | 重量 g | 內徑 | | 外徑 | | 長度 | | 外扣環溝 | | | W | 偏心 (max.) | 動 C(kgf) | 靜 Co(kgf) | |
| | | | dr | 公差 | D | 公差 | L | 公差 | B | 公差 | D1 | | | | | |
| LM 6L | 4 | 16 | 6 | 0 | 12 | 0 | 35 | 0 | 27 | 0 | 11.5 | 1.1 | 0.015 | 33 | 54 | |
| LM 8L | | 31 | 8 | | 15 | -0.013 | 45 | | 35 | | 14.3 | 1.1 | | | | |
| LM10L | | 62 | 10 | | 19 | -0.010 | 55 | | -0.30 | | 44 | 0 | | 18 | 1.3 | |
| LM12L | | 80 | 12 | | 21 | | 0 | | | | 57 | | | 46 | 20 | 1.3 |
| LM13L | | 90 | 13 | | 23 | | -0.016 | | | | 61 | | | 46 | 22 | 1.3 |
| LM16L | 5 | 145 | 16 | 28 | 70 | 53 | 27 | 1.6 | 126 | 240 | | | | | | |
| LM20L | | 180 | 20 | 32 | 0 | 80 | 61 | 30.5 | 1.6 | 143 | 280 | | | | | |
| LM25L | 6 | 440 | 25 | 40 | 0 | 112 | 82 | 38 | 1.85 | 0.020 | 159 | 320 | | | | |
| LM30L | | 480 | 30 | 45 | -0.012 | 123 | 89 | 43 | 1.85 | | | | | | | |
| LM35L | | 795 | 35 | 52 | 0 | 135 | 99 | 49 | 2.1 | 0.025 | 270 | 640 | | | | |
| LM40L | | 1170 | 40 | 60 | 0 | 151 | 121 | 57 | 2.1 | | | | | | | |
| LM50L | | 3100 | 50 | 80 | -0.015 | -0.022 | 192 | 148 | 76.5 | | 2.6 | | | | | |
| LM60L | | 3500 | 60 | 90 | 0 | 0 | 209 | 170 | 86.5 | | 3.15 | 770 | 2040 | | | |