



# SRJ-CRD



外徑  $\phi$ D20 ~  $\phi$ D30

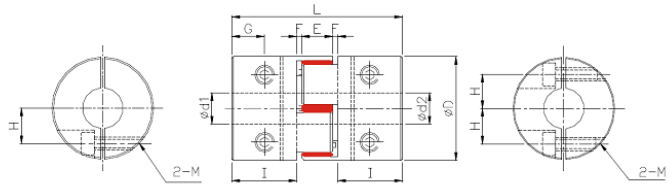

外徑  $\phi$ D40 ~  $\phi$ D65

Model No.	D	I	L	E	F	G	H	M	d1×d2 Stock Bores(H7)		Weight (g)
									Min	Max	
SRJ-20C-RD	20	10	30	8	1	5	6.5	M2.5	5	8	19
SRJ-30C-RD	30	11	35	10	1.5	5.5	10	M4	6	14	50
SRJ-40C-RD	40	25	66	12	2	8.5	14	M5	10	16	190
SRJ-55C-RD	55	30	78	14	2	10.5	20	M6	15	25	412
SRJ-65C-RD	65	35	90	15	2.5	13	24	M8	15	35	560

Model No.	Rated Torque (N.m)	Max. Torque (N.m)	Max Rotational (Rpm/min)	Moment of Inertia (Kg . m <sup>2</sup> )	Errors of Eccentricity (mm)	Errors of Angularity (°)	Errors of End-Play (mm)
SRJ-20CRD	5.0	10	23000	1.0×10 <sup>-6</sup>	0.10	1.0	±0.4
SRJ-30CRD	12.5	25	19000	6.1×10 <sup>-6</sup>	0.10	1.0	±0.5
SRJ-40CRD	17.0	34	14000	3.8×10 <sup>-5</sup>	0.10	1.0	±0.6
SRJ-55CRD	60.0	120	10500	1.5×10 <sup>-4</sup>	0.10	1.0	±0.7
SRJ-65CRD	160.0	320	8500	3.8×10 <sup>-4</sup>	0.10	1.0	±0.75
SRJ-80CRD	450.0	900	7100	6.2×10 <sup>-3</sup>	0.10	1.0	±0.8