

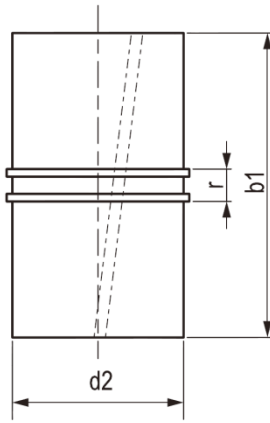


樹脂直線軸承-LIN-12 滑動膜



型號	d1 mm	公差 mm	d2 mm	b1 mm	r(-0.1/-0.2) mm	重量 g
LIN-12-10	10	+0.030 ~ -0.070	12	25	3.0	1.1
LIN-12-12	12	+0.030 ~ -0.070	14	27	3.0	1.4
LIN-12-16	16	+0.030 ~ -0.070	18	29	3.5	1.9
LIN-12-20	20	+0.030 ~ -0.070	23	29	5.0	3.3
LIN-12-25	25	+0.030 ~ -0.070	28	39	5.0	5.5
LIN-12-30	30	+0.040 ~ -0.085	34	49	5.0	11.1
LIN-12-40	40	+0.040 ~ -0.085	44	59	6.0	19.0
LIN-12-50	50	+0.050 ~ -0.100	55	69	7.0	35.3

裝配尺寸

型號	d1 mm	D H7 mm	B h10 mm	r mm	t mm
LIN-12-10	10	12	26	3.0	1.0
LIN-12-12	12	14	28	3.0	1.0
LIN-12-16	16	18	30	3.5	1.0
LIN-12-20	20	23	30	5.0	1.0
LIN-12-25	25	28	40	5.0	1.0
LIN-12-30	30	34	50	5.0	1.0
LIN-12-40	40	44	60	6.0	1.5
LIN-12-50	50	55	70	7.0	1.5

