


WCS 高週波鍍鉻軸心

SUJ2 SHAFT

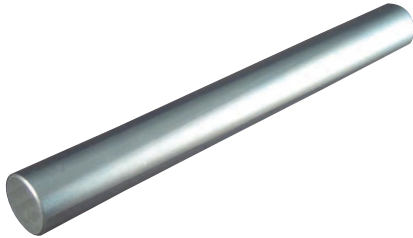

WCS

型號 MODEL NO.	外徑 DIAMETER	外徑精度 DIAMETER TOLERANCE	長度 MAX LENGTH	硬化深度 DEPTH OF EFFECTIVE HARDENED LAYER	重量 WEIGHT
	D	g6(mm)	L(mm)	(mm)	kg/m
WCS 3	3	-0.004~-0.012	400	>0.8 0.8 and more	0.06
WCS 4	4	-0.004~-0.012	400		0.10
WCS 5	5	-0.004~-0.012	1000		0.16
WCS 6	6	-0.004~-0.012	4010		0.22
WCS 8	8	-0.005~-0.014	4010	>1.0 1.0 and more	0.40
WCS 10	10	-0.005~-0.014	4010		0.62
WCS 12	12	-0.006~-0.017	4010		0.89
WCS 13	13	-0.006~-0.017	4010	>1.5 1.5 and more	1.04
WCS 16	16	-0.006~-0.017	4010		1.58
WCS 20	20	-0.007~-0.020	6000		2.47
WCS 25	25	-0.007~-0.020	6000	>2.0 2.0 and more	3.85
WCS 30	30	-0.007~-0.020	6000		5.55
WCS 35	35	-0.009~-0.025	6000		7.55
WCS 40	40	-0.009~-0.025	6000	>2.5 2.5 and more	9.87
WCS 50	50	-0.009~-0.025	6000		15.40
WCS 60	60	-0.010~-0.029	6000	>3.0 3.0 and more	22.20
WCS 80	80	-0.010~-0.029	6000		39.45
WCS100	100	-0.012~-0.034	6000		61.65

材質：軸承鋼(SUJ2)+表面鍍硬鉻
硬度：HRC 62±2

Material : SUJ2+Chromium plated
Hardness:HRC 62±2